
Phoenix™ 4400DHP-2



The Phoenix™ 4400DHP-2 laminator continues the evolution of the line of Phoenix laminators with the addition of an LED operation panel, print supply shaft & adjustable sleep timer.

It still offers a sleek design full of useful features to complete both thermal and PSA applications in one machine. The unit promises long-term durability and reliable performance at a price point which will easily fit into your budget.

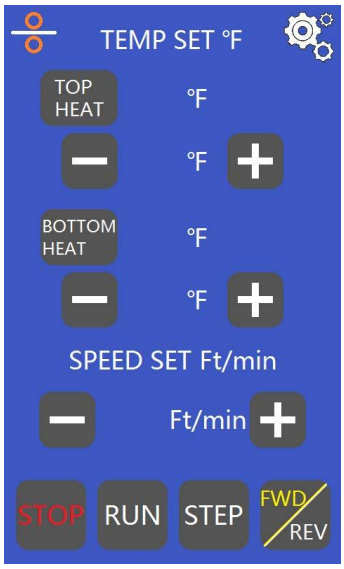

Control Panel



Shaft Cradle / Core Gripper



Roller Gap Adjustment Lever

SPECIFICATIONS

Maximum Laminating Width:	44” wide
Heat Rollers:	3.5” diameter
Core Diameter:	3” & 2-1/4”
Lower Film Supply J-Channel:	Yes, for easier loading
Auto Grip Supply Shafts:	Yes
Print Supply Shaft:	Yes, lower front
Temperature Range:	90° – 302° F
Heating Method:	Quartz tube
Independent Heat Controls:	Yes
Warm-up Time:	20 – 25 minutes
Protective Shield:	Yes
Optical Safety Eye:	Yes
Pressure Adjustment:	5 lever controls up to 1/4”
Cooling Fans:	Yes
Independent Tension Controls:	Yes
PSA Liner Rewind:	Yes
Speed Control:	Variable, 0.5 - 8 fpm
Film Thickness:	1.5 – 10 mil and PSA
Footage Counter:	Yes
Foot Pedal:	Yes
Sleep Mode Timer:	Yes
Emergency Stop:	Yes
Stand Included:	Yes
Dimensions With Stand:	61” W x 32” D x 53” H
Electrical:	240V, 15A, 615P NEMA plug
Power Consumption:	3100 watts
Weight:	401 lbs.
Shipping Weight:	485 lbs.
Shipping Dimensions:	64” x 29” x 26”
Certifications:	cTUVus

Warranty: 1-year parts, 3 months on labor & rollers

APPLICATIONS

- Thermal Lamination
- PSA Mounting
- PSA Lamination
- Window Graphics
- POP Displays
- Trade Show Graphics
- Create Decals
- Thermal Mounting
- Pre-Coating Boards
- Banners
- Flexible Displays
- Rigid Displays
- Signage
- Floor Graphics

LEADERS IN BINDING & LAMINATING. We are not trying to be the biggest, but we are trying to be the best!

BINDING & LAMINATING SOUTHWEST COME TOGETHER. RIGHT NOW.

109 Millwell Ct, PO Box 150, Maryland Heights, MO 63043-9150
(800) 325-3628 • www.swbindinglaminating.com