

High-volume commercial laminator with heat assist and integrated front feeder and dual rewinders.



Highlights

- **Heavy Duty Motor** – Fast lamination speeds of over 28 feet per minute
- **Rotary Dial Gap Adjustment** – Infinite height settings from lamination mode up to 2”
- **Heat Assist Top Roller** – Help to reduce the naturally occurring phenomenon know as “Silvering”
- **Roll-To-Roll Lamination** – Front feeder and 2 rewinders (front and rear) standard
- **Film-Saver**– Automatically slows rollers speed when media is not detected to prevent waste


Professional Series



**SPEEDS UP TO
28 FT./MIN.**

**UP TO 2"
MOUNTING**

**CONVENIENT
FEATURES**

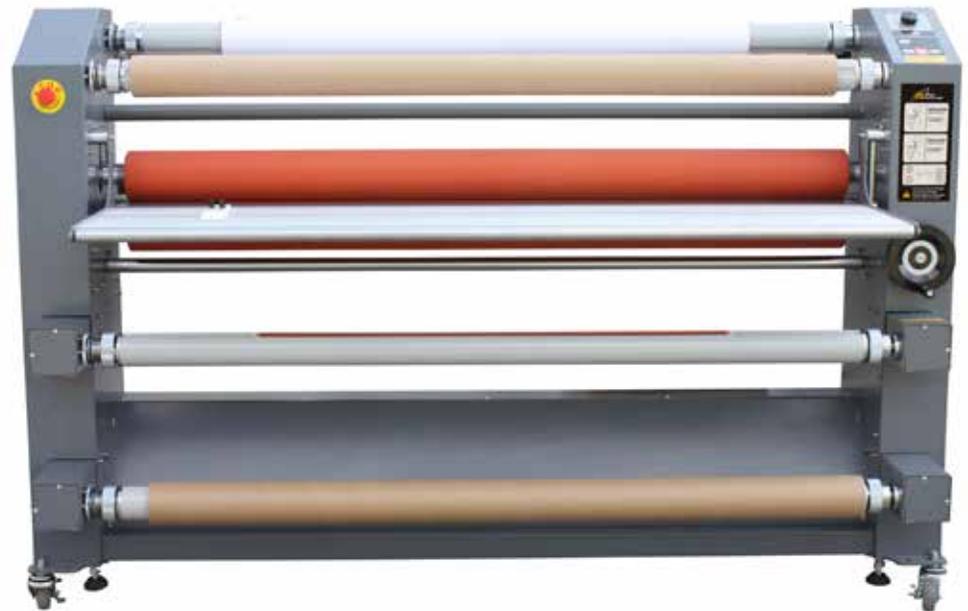

HIGHLIGHTS

Maximum Width	
RSC-6500H	65" (1650 mm)
RSC-5500H	55" (1400 mm)
Maximum Speed	28 ft./min. (8.5 m./min.)
Mounting	Up to 2"
Gap Adjustment	Rotary Dial
Front Feeder	Yes
Rewinder	Front & Rear Facing
Reverse	Yes
Table	Flip Up
Emergency Stops	Front & Rear Facing
Rear Remote	Yes
Shaft Size	3" Auto-Grip Shafts

DIMENSIONS & WEIGHT

Dimensions (WxDxH)	
RSC-6500H	87" x 39" x 55"
RSC-5500H	77" x 39" x 55"
Weight	
RSC-6500H	750 lbs.
RSC-5500H	660 lbs.
Crate Dimensions (WxDxH)	
RSC-6500H	91" x 35" x 70"
RSC-5500H	81" x 35" x 70"
Crate Weight	
RSC-6500H	1080 lbs.
RSC-5500H	926 lbs.
UPC Code	
RSC-6500H	8 49023 07008 5
RSC-5500H	8 49023 07006 1

**Warranty
Parts & Labor 1 Year**